

2022 / 2023 ÜRÜN KATALOĞU



CAFE ISITMA SİSTEMLERİ

www.arsismuhendislik.com.tr




PİETRA S SERAMİK ISITICI

UZAKTAN KUMANDALI




3 KADEMELİ ISI AYARI

8 KW /12 KW /18 KW GÜÇ

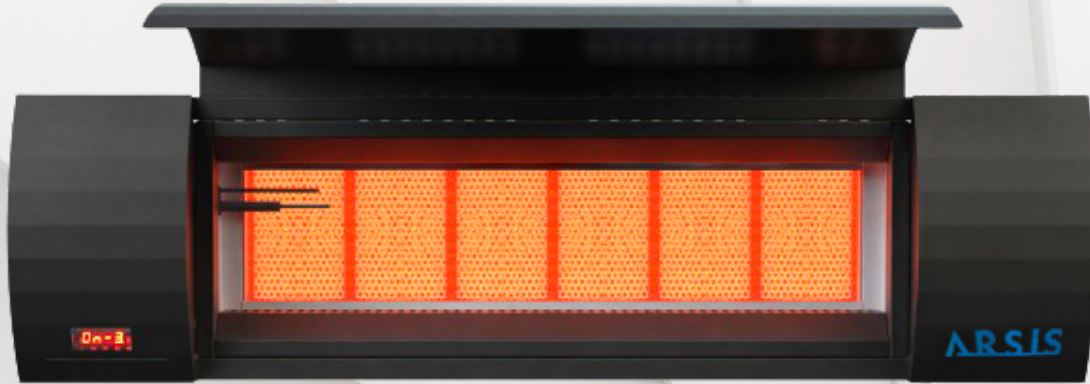

PİETRA S SERAMİK ISITICI

TEKNİK ÖZELLİKLER

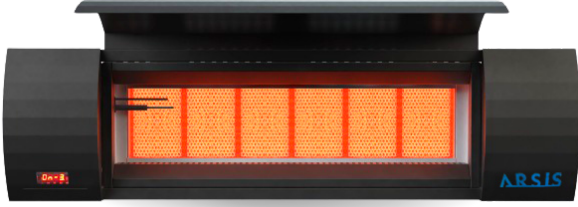

ARSİS

MODEL		PİETRA 4	PİETRA 6	PİETRA 10
SERAMİK	ADET	4	6	10
GÜÇ	KW	8	12	18
TÜKETİM	M3	0.83	1.24	1.83
ISITMA ALANI	DIŞ MEKAN	8	12	18
	İÇ MEKAN	16	24	36
ASMA YÜKSEKLİĞİ	MT.	2.2	2.5	3
AĞIRLIK	KG.	12.5	15.8	18.65
NOX SINIFI		4		
ENERJİ BAĞLANTISI		230 V 50 HZ.		
GAZ GİRİŞİ		20 Mb		
TİP		A 1		




PİETRA P SERAMİK ISITICI

RÜZGARA KARŞI PETEK PANELİ

UZAKTAN KUMANDALI




3 KADEMELİ ISI AYARI

8 KW /12 KW /18 KW GÜÇ

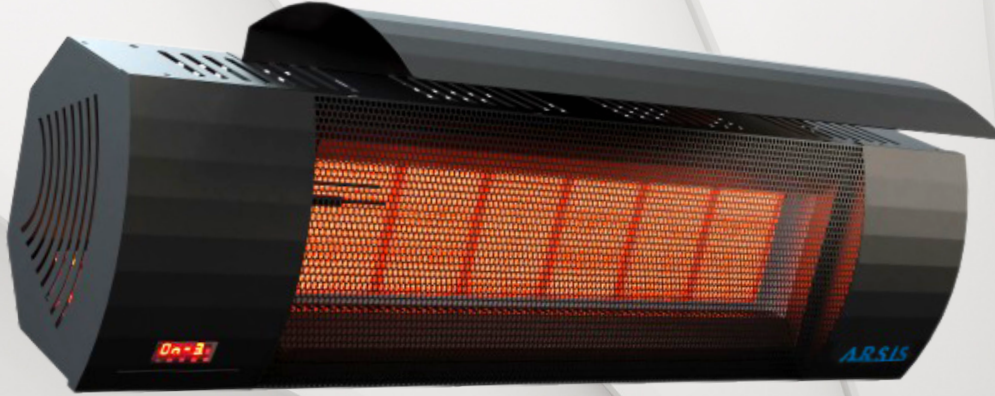

PİETRA P SERAMİK ISITICI

TEKNİK ÖZELLİKLER

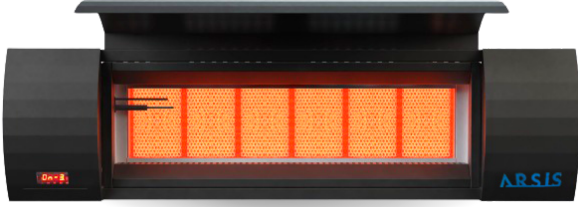

ARSİS

MODEL		PİETRA 4 P	PİETRA 6 P	PİETRA 10 P
SERAMİK	ADET	4	6	10
GÜÇ	KW	8	12	18
TÜKETİM	M3	0.83	1.24	1.83
ISITMA ALANI	DIŞ MEKAN	8	12	18
	İÇ MEKAN	16	24	36
ASMA YÜKSEKLİĞİ	MT.	2.2	2.5	3
AĞIRLIK	KG.	12.5	15.8	18.65
NOX SINIFI		4		
ENERJİ BAĞLANTISI		230 V 50 HZ.		
GAZ GİRİŞİ		20 Mb		
TİP		A 1		



VETRO W SERAMİK ISITICI

TAM CAMLI ESTETİK GÖRÜNÜM

UZAKTAN KUMANDALI



3 KADEMELİ ISI AYARI

8 KW /12 KW /18 KW GÜÇ



VETRO W SERAMİK ISITICI

TEKNİK ÖZELLİKLER



ARSIS

MODEL		VETRA 4 W	VETRA 6 W	VETRA 10 W
SERAMİK	ADET	4	6	10
GÜÇ	KW	8	12	18
TÜKETİM	M3	0.83	1.24	1.83
ISITMA ALANI	DIŞ MEKAN	8	12	18
	İÇ MEKAN	16	24	36
ASMA YÜKSEKLİĞİ	MT.	2.2	2.5	3
AĞIRLIK	KG.	12.95	15.8	18.65
NOX SINIFI		4		
ENERJİ BAĞLANTISI		230 V 50 HZ.		
GAZ GİRİŞİ		20 Mb		
TİP		A 1		



CALDO SERAMİK ISITICI

UZAKTAN KUMANDALI

3 KADEMELİ ISI AYARI

DAHİLİ TERMOSTAT


YAZLIK MOD

25 / 35 / 45 / 55 KW GÜÇ



CALDO SERAMİK ISITICI

TEKNİK ÖZELLİKLER

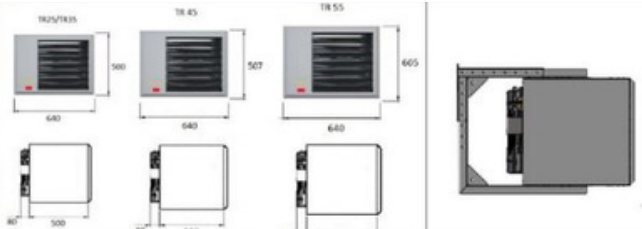

ARSİS

MODEL	TR 20	TR 30	TR40	TR 50
GÜÇ / KW	25	35	45	55
TÜKETİM / M3	2,62	3,67	4,72	5,77
GÜRÜLTÜ / dB(A)	46	46	48	48
MAX. ÜFLEME / M3/h	3050	3050	4500	4500
ENERJİ VERİMİ / %	93,8	93,5	93,3	93,9
ISITMA ALANI / M2	100	150	200	250
AĞIRLIK / KG	34	39	44	49
NOX SINIFI	4			
ENERJİ BAĞLANTISI	230 V 50 HZ.			
GAZ GİRİŞİ	20 Mb			
TİP	B 1			



TUBOLARE L

UZAKTAN KUMANDALI

3 KADEMELİ ISI AYARI

TEK VE ÇİFT BORULU

15 KW / 58 KW GÜÇ




TUBOLARE L SERAMİK ISITICI

TEKNİK ÖZELLİKLER




MODEL	A	GÜÇ/KW	GAZ TÜK.M3	NOX	GAZ GİRİŞİ
TT 20 L	6 MT.	20	2,1	4	1/2
TT 32 L	9 MT.	32	3,3	4	1/2
TT 38 L	12 MT.	38	4,0	4	1/2
TT 48 L	15 MT.	48	5,0	4	1/2
TT 58 L	18 MT.	58	6,1	4	1/2



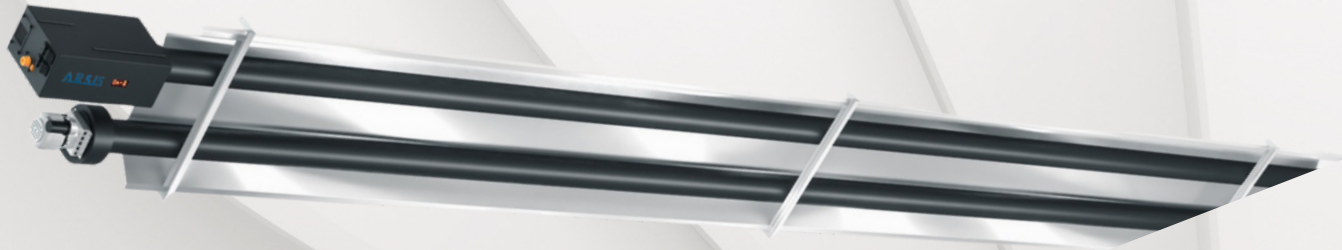


TUBOLARE U SERAMİK ISITICI


TEKNİK ÖZELLİKLER

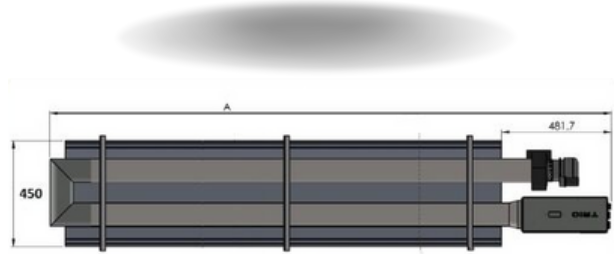


MODEL	A	GÜÇ/KW	GAZ TÜK.M3	NOX	GAZ GİRİŞİ
TT 15 U	3 MT.	15	1,6	4	1/2
TT 20 U	3 MT.	20	2,1	4	1/2
TT 32 U	6 MT.	32	3,3	4	1/2
TT 38 U	6 MT.	38	4,0	4	1/2
TT 48 U	9 MT.	48	5,0	4	1/2
TT 58 U	9 MT.	58	6,1	4	1/2

 **ARSİS**

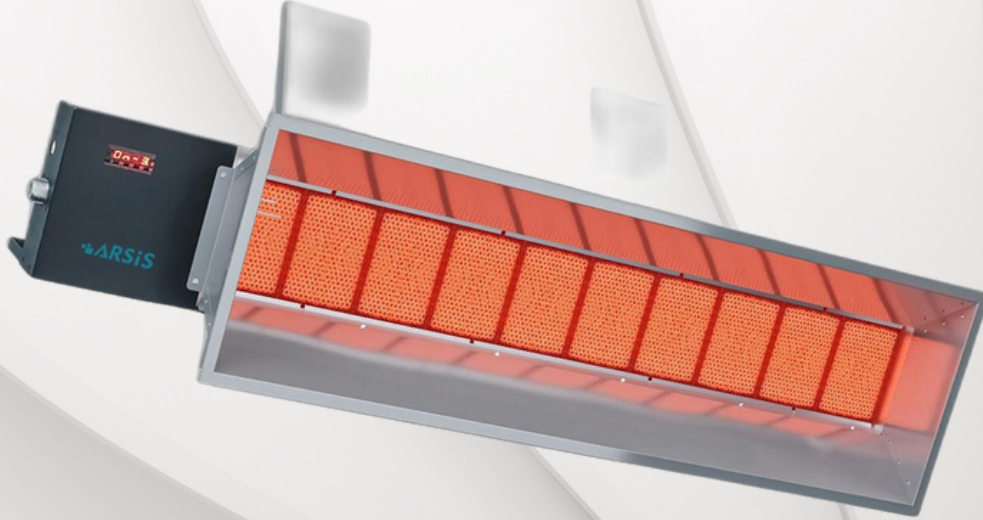


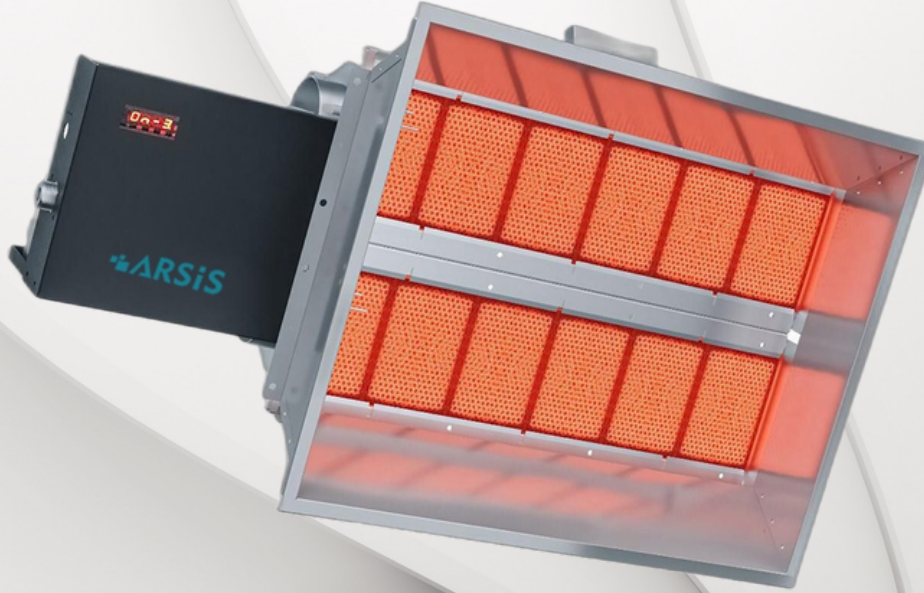

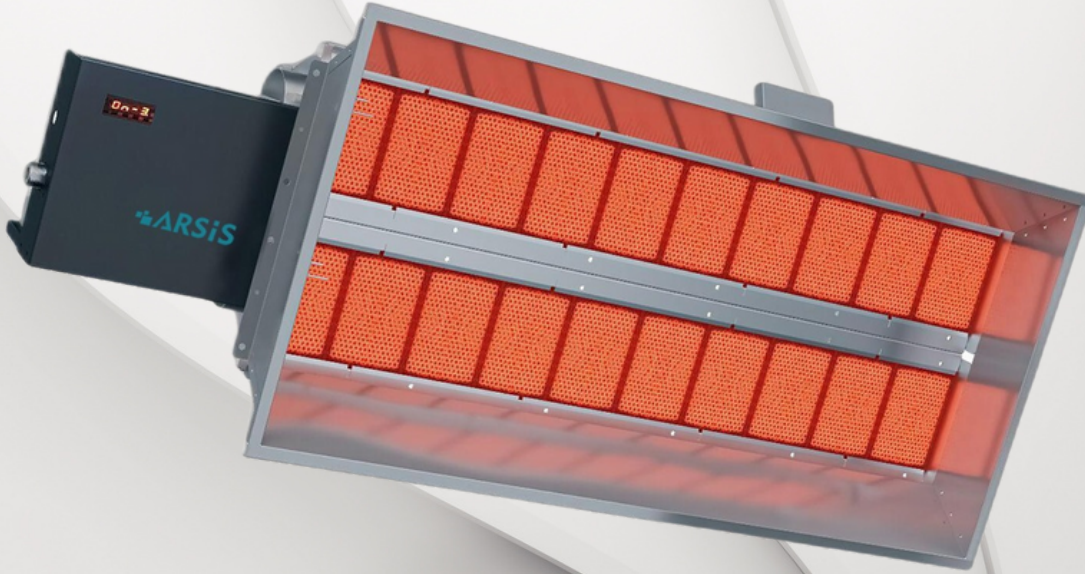

ENDÜSTRİYEL SERAMİK ISITICI

TEKNİK ÖZELLİKLER

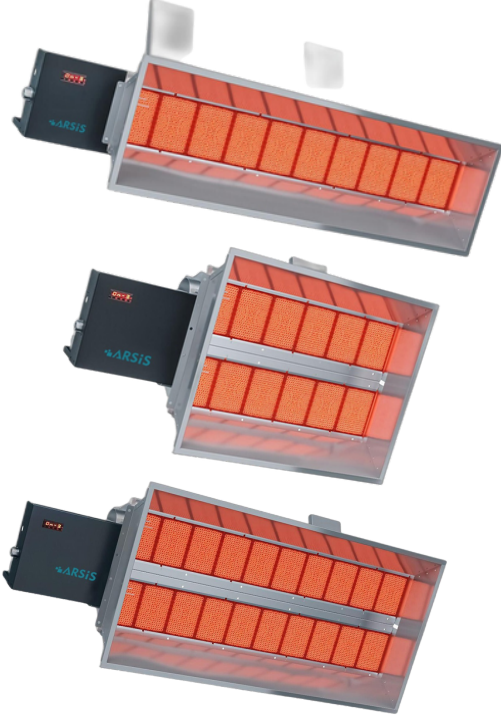


MODEL		END 18	END 24	END 36
SERAMİK	ADET	9	12	18
GÜÇ	KW	18	24	36
TÜKETİM	M3	1.88	2.85	3.37
ISITMA ALANI	DIŞ MEKAN	40	50	60
	İÇ MEKAN	45	55	65
ASMA YÜKSEKLİĞİ	MT.	3-4.5M	3.2-5M	3.5-6M
AĞIRLIK	KG.	28	28	28
ENERJİ BAĞLANTISI		230 V 50 HZ.		
GAZ GİRİŞİ		G3 / 4		

 **ARSİS**

ARSİS

ARSİS ELEKTRİKLİ ISITICI

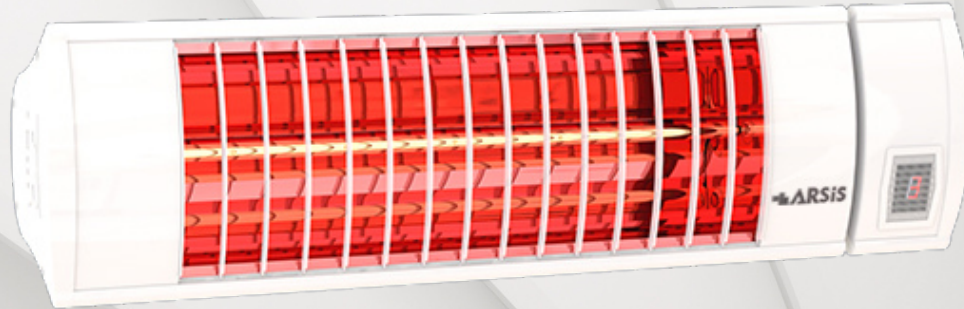



ARSİS

ARSİS ELEKTRİKLİ ISITICI



ARSİS ELEKTRİKLİ ISITICI

TEKNİK ÖZELLİKLER

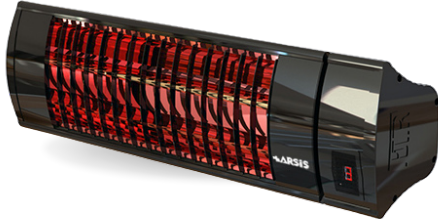
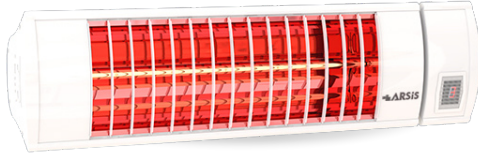


MODEL	GÜÇ/W	Ç.GERİLİM	BOYUT (mm)	MONTAJ YÜK. (m)
ERT-2000	2000	220	500x110x50	1.5 - 2.5
EIR-2000	2000	220	530x150x65	1.5 - 2.5
EIR-3000	2000	220	800x150x65	1.5 - 3.0
EIR-RC2000 KUMANDALI	2000	220	610x150x65	1.5 - 2.5
EIR-RC3000 KUMANDALI	3000	220	880x150x65	1.5 - 3.0
EIR-RC4000 KUMANDALI	4000	220	1050x150x65	1.5 - 3.0






 **ARSiS**

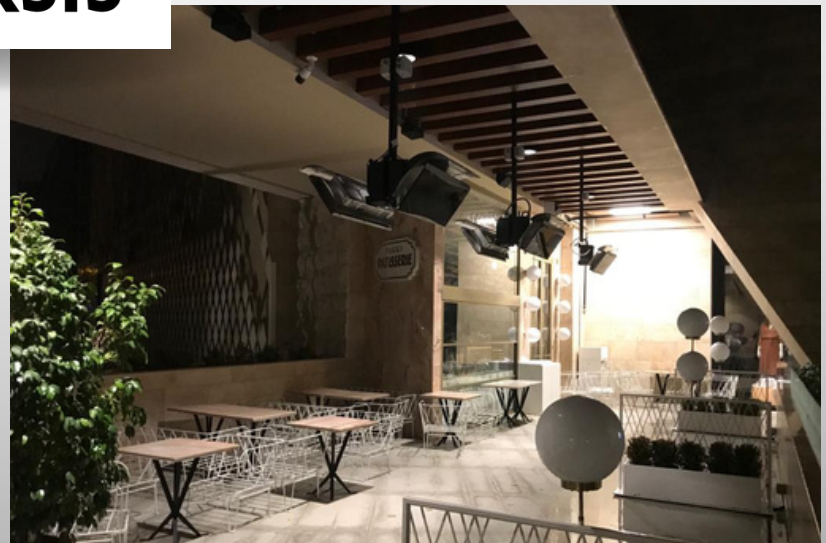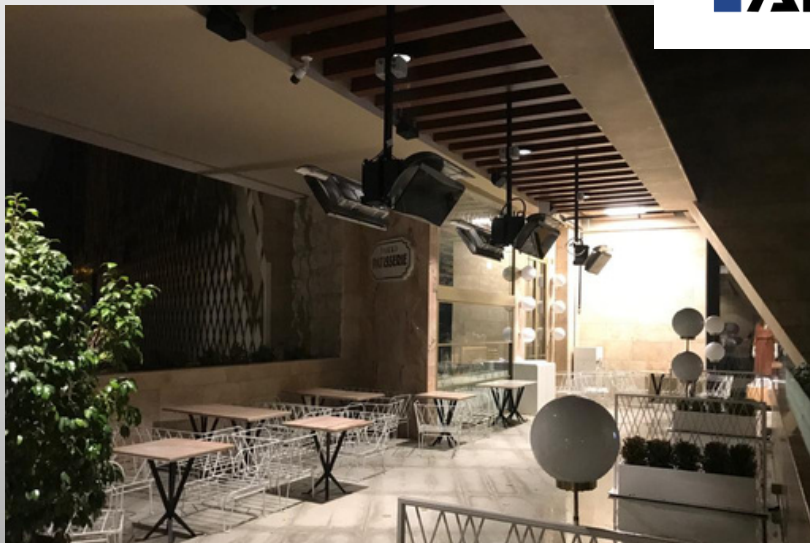



 **ARSiS**



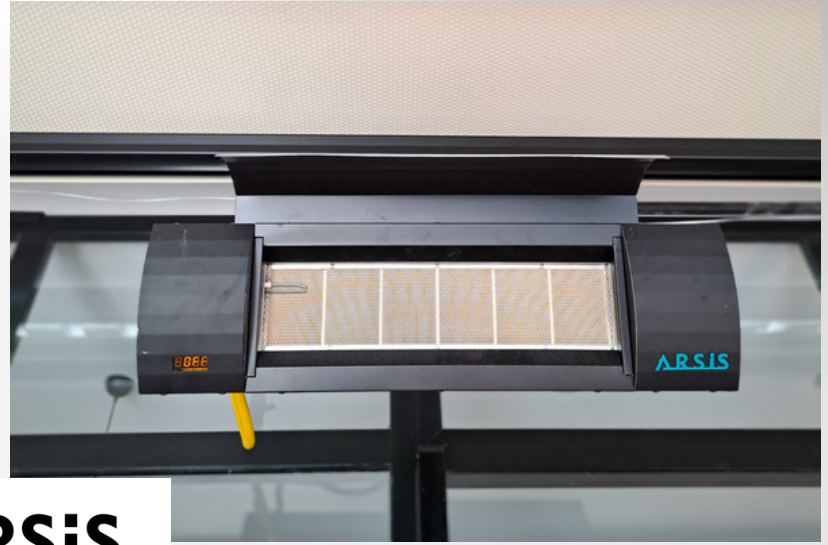



 **ARSiS**





 **ARSIS**





 **ARSiS**





 **ARSiS**





 **ARSiS**





 **ARSIS**





+90 546 401 54 02
+90 543 217 77 79
+90 322 201 13 13



info@arsismuhendislik.com.tr



Çarkıpare Mh. 1247 Sk. Berk Apt.
No:14/9 Sarıçam/ADANA



CAFE ISITMA SİSTEMLERİ

www.arsismuhendislik.com.tr